



# EURO& MICRO-STYLE QUICK DISCONNECT RECEPTACLES

## View

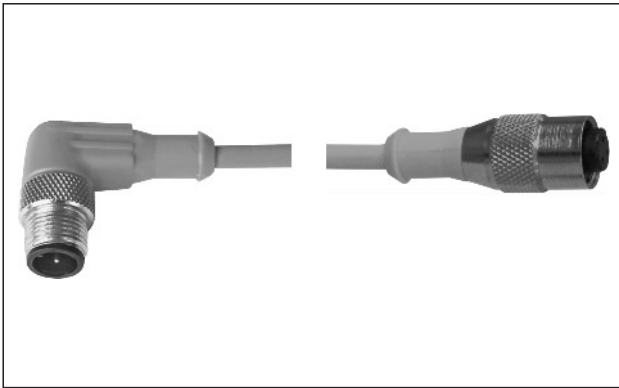

- Euro, Right-angle - style
- Micro, straight - style
- With moulded cable
- Screw locking with (auto) securing safety nut

## Dimensional data

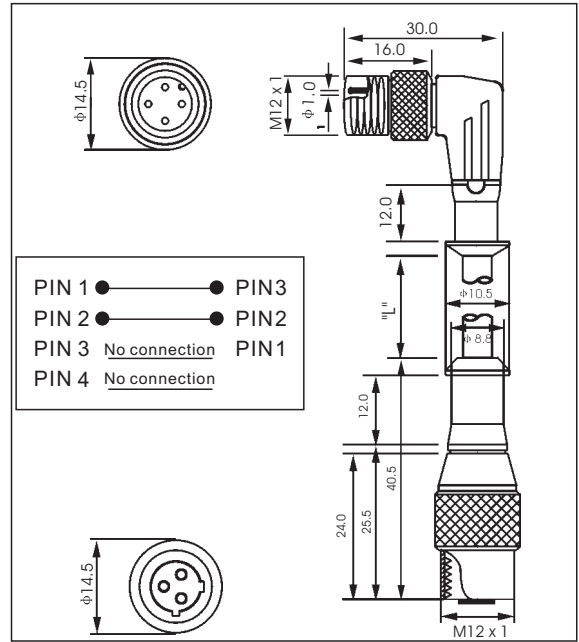

## Technical Data

Application Class: HNA acc. to DIN 40040  
 (-25 °C / +90 °C / ≤ 100%rF)  
 Moulded Body: PVC, self-extinguishing  
 Nominal Power: 4A  
 Nominal Voltage: 3+4poles, 250VAC/300VDC  
 5poles, 30VAC/36VDC  
 Contact: CuZn, pre-nickel and  
 0.8 microns gold-plated

Body: TPU, self-extinguishing  
 Securing Safety Nut: Nickel plated brass  
 Protection: IP 68  
 Insulation Resistance: C acc. to VDE 0110  
 Test Voltage: 3+4poles, 2.0 KV eff./60s.  
 5poles, 1.5 KV eff./60s.  
 Insulation Resistance: > 10<sup>9</sup> Ω

## Catalog Number

Part-No	Poles	Face View male/female	Color Code	Conductors		Outer Jacket	
				Guage	Stranding	φ mm	Material
R-MA4/2TZY792 +U-FS3/2TAY792	4 + 3		1=brown 2=blue 3= - 4= -	0.34mm <sup>2</sup>	42 x φ 0.10	5.0	PUR/PVC
			1= - 2=brown 3=blue				

Standard length: 2.0 m, 5.0 m, 7.5 m, 10.0 m. Other cable length or cable specifications on request.