


# VALVE-CONNECTORS, IP67

## View



- Valve connector similar to DIN EN 175301-803
- Industry standard form C, 9.4mm
- With LED function indicator, varistor voltage protection
- Connected protective earth

## Dimensional data

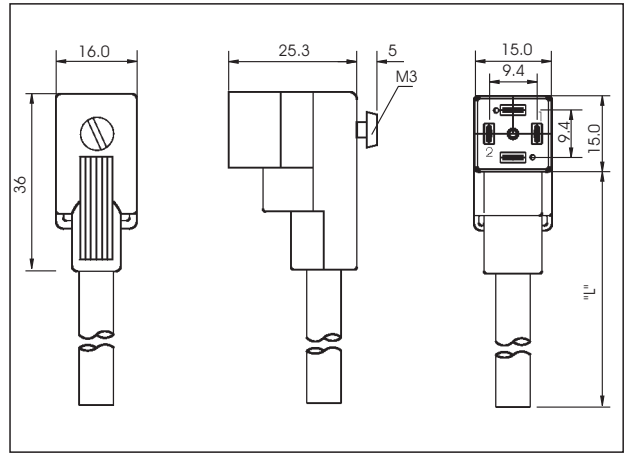

## Technical Data

Operating temperature : -25 °C /+80 °C  
 Housing/Molded body : TPU, self-extinguishing  
 Degree of Protection : IP 67  
 Contact : CuZn, nickel-plated and tin-plated

Contact Resistance :  $\leq 5m\Omega$   
 Nominal current at 40 °C : 4A  
 Nominal Voltage : 24V  
 Rated Voltage : 32V  
 Pollution degree : 3

## Catalog Number

Part-No	Poles	Face View female	Color Code	Conductors		Outer Jacket		Circuit Protection
				Guage	Stranding	$\phi$ mm	Material	
V-FANGVY052	2+ 		1 = brown 2 = blue = green / yellow	0.50mm <sup>2</sup>	16x $\phi$ 0.20	5.5	PUR/PVC	
V-FANGVV552				0.50mm <sup>2</sup>	16x $\phi$ 0.20	5.0	PVC irradiated	

"L"=Standard length:2.0m,3.0m,5.0m,10.0m. other cable length or cable specifications on request.


# VALVE-CONNECTORS,IP67

## View



- Valve connector similar to DIN EN 175301-803
- Industry standard form C (9,4mm)
- 2+earth connection
- Connected protective earth
- Without circuitry

## Dimensional data

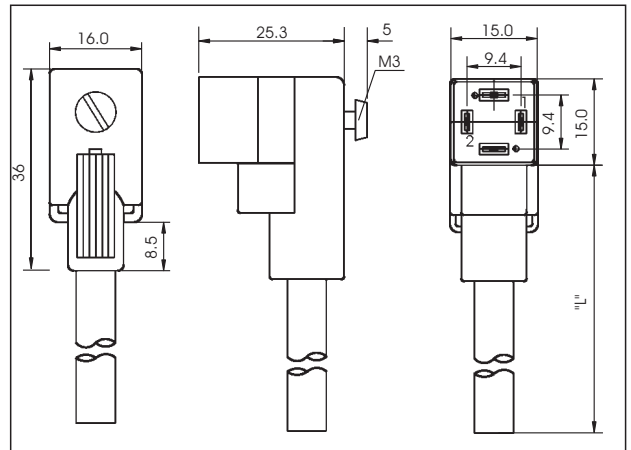

## Technical Data

Operating temperature : -25 °C /+80 °C  
 Housing/Molded body : TPU, self-extinguishing  
 Degree of Protection : IP 67  
 Contact : CuZn, nickel-plated and tin-plated

Contact Resistance :  $\leq 5m\Omega$   
 Nominal current at 40 °C : 4A  
 Nominal Voltage : 240V  
 Rated Voltage : 250V  
 Pollution degree : 3

## Catalog Number

Part-No	Poles	Face View female	Color Code	Conductors		Outer Jacket	
				Guage	Stranding	$\phi$ mm	Material
V-FANGOV532	2+ 		1 = brown 2 = blue = green / yellow	0.50mm <sup>2</sup>	16 x $\phi$ 0.20	5.0	PVC

"L"=Standard length:2.0m,3.0m,5.0m,10.0m. other cable length or cable specifications on request.