


Couplings: SCAN 2532

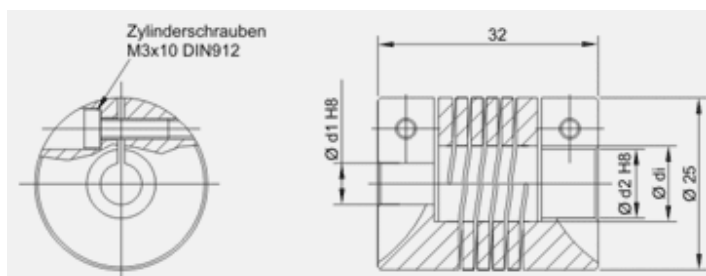

d1	d2	Order No.
6	10	SCAN 2532 06/10
8	8	SCAN 2532 08/08
10	10	SCAN 2532 10/10

technische Daten / technical data		SCAN 2532
max. Drehzahl / max speed	min ⁻¹	6.000
max. Drehmoment / max. torque	Ncm	200
max. Wellenversatz / max. offset of shafts		
radial / radial	mm	±0,35
axial / axial	mm	±0,5
angular / angular	Grad / degree	±4
Drehfedersteife / torsion spring stiffness	Nm/rad	2,9
Radialfedersteife / radial spring stiffness	Nm/mm	150
Trägheitsmoment / moment of inertia	g/cm ²	84
Max M. der Schraube / max clamping torque	N/cm	200
Gewicht ca. / weight appr.	g	88
Werkstoff / material	Edelstahl / stainless steel	1.4104